LED warning light

HNTD®

LED strips primary light source, high voltage protection circuit, full aluminium wick, polychromatic light dispersion shell.
Voltage: 6V,12V,24V,36V,110V,220V Single phase current: 40 mA
lamp bead amount : 12particles 3528 primary color lamp bead for each layer.
Function : Long-bright, shiny, a variety of buzzing
Structure: monolayer&multicolor, multilayer&multicolor
Installation: Stem-disc, L bar , folding, Cylinder

Series TD-50

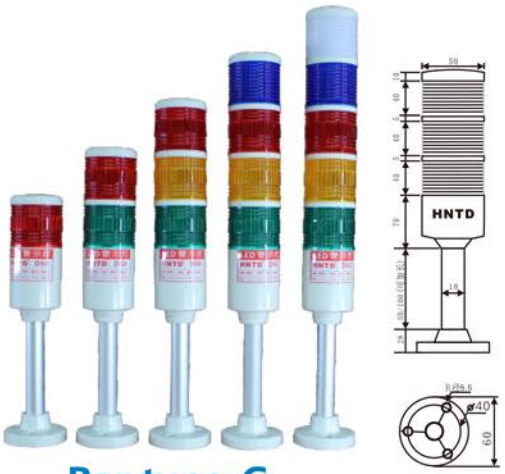

Bar type-G

Cylinder type-T

Regular Heighten

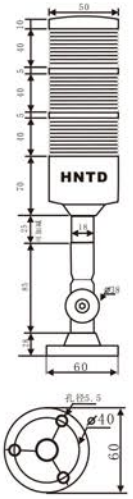

Folding type-Z

L bar type-L

single layer with multi-color

Some non-standard products can be customized as follow:

1、Non-standard voltage and a variety of control mode
2、The length of all kinds of lamp-post are not limited
3、The shell color can be changed according to customers' requirements
4、Alarm sounds can be customized to a variety of tone、volume and music.
5、Warning lights can be customized to any appearance and functions.
6、Warranty : replace with 1 year , One-Year Limited Warranty